

3-22-00

A

JC780 U.S. PTO
03/20/00


Attorney Docket No. P992084

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC542 U.S. PTO
09/531658
03/20/00

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on March 20, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR § 1.10, Mailing Label Number EL 391268870 US, addressed to Assistant Commissioner of Patents, Washington, DC 20231.


Steve S. Cha

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing is the patent application under 37 CFR § 1.53(b) in the name of inventor(s) of:

Seng-Wook Sim; Joung-Kyou Park; Ki-Sang Jeon; Young-Jin Lee

For: DATA TRANSMITTING AND RECEIVING APPARATUS AND METHOD FOR DIGITAL MOBILE STATION

Enclosed are:

Application Elements:

- ☒ 2 copies each of 12 sheets of informal drawing(s).
- ☒ Assignment of the invention to: SAMSUNG ELECTRONIC CO., LTD.
- ☒ Specification, Claims, and Abstract: Nr. of sheets: 40
- ☒ A copy of combined declaration and power of attorney:

Accompanying Application Parts:

- ☒ A check* 1641 in the amount of \$1,416.00 for filing fee
- ☒ A Return Receipt Postcard
- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☒ Claim of priority under 35 U.S.C. § 119 and a copy of certified Korean Patent Application.

09591698 032000

- ☐ Information disclosure statements: Nr. of sheets: 3
- ☐ Preliminary Amendment
- ☐ Small Entity Statement(s)
- ☐ Other:

JC542 U.S. PTO
09/531658
03/20/00

The filing fee has been calculated as shown below (37 CFR §1.16):

For:	No. Filed	No.Extra	Rate(Small Entity)	Fee(Small Entity)
Basic Fee	20 claims			\$ 690.00
Total Claims	43 claims – 20 =	23	\$18(\$9)/claim	\$ 414.00
Independent Claims	7 claims – 3 =	4	\$78(39)/claim	\$ 312.00
Multiple Dep.Claims			\$130(65)/claim	\$ 0.00
Total Filing Fee				\$ 1,416.00


General Authorization for Petition for Extension of Time (37 CFR §1.136)

Applicant hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings.

Should the enclosed check become lost or detached from the file, Assistant Commissioner is authorized to charge our Deposit Account No. 50-1005 and advise the undersigned attorney accordingly. Also, should the enclosed check be deemed to be deficient or excessive in payment, the Commissioner is authorized to charge or credit our deposit account and notify the undersigned attorney of any such transaction.

In view of the above, it is respectfully requested that this application be accorded a filing date pursuant to 37 C.F.R. §1.53(b).

Mailed: March 20, 2000


Steve S. Cha, Registration No. 44,069
Attorney for Applicant(s)

Please address all Correspondence to:
Steve S. Cha, Esq.
67 Wall Street #2411
New York, NY 10005-3198
Tel: (212)968-7101
Fax: (212)968-7105

Customer No:022491



022491

PATENT TRADEMARK OFFICE

DATA TRANSMITTING AND RECEIVING APPARATUS AND METHOD FOR A
DIGITAL MOBILE STATION

CLAIM OF PRIORITY

5

This application makes reference to, incorporates the same herein, and claims all benefits accruing under 35 U.S.C. Section 119 from an application for DATA TRANSMITTING AND RECEIVING APPARATUS AND METHOD FOR A DIGITAL MOBILE STATION filed earlier in the Korean Industrial Property Office on March 19, 1999 and there duly assigned Serial No. 36348/1995.

10

BACKGROUND OF THE INVENTION

1. Field of the Invention

15

The present invention relates to an apparatus and method of transmitting and receiving storage data for a digital mobile station. More particularly, the present invention relates to a data transmitting and receiving apparatus and method which can transmit and receive a large capacity of data using a short message service.

2. Description of the Related Art

20

Typically, the user of a digital mobile terminal can make a sentence into blocks according to a short message service (SMS) specification whose internal construction is standardized. Using the SMS implemented in the mobile station, the mobile terminal can

transmit the blocks to a receiving party. In order to effectuate the SMS, a plurality of functions for preparing, editing, and sending a series of characters or a sentence should be implemented in the mobile station by the digital mobile station system.

FIG. 1 shows the construction of the whole mobile station system where the SMS is performed. Referring to FIG. 1, if the user of a mobile station (MS) 10 prepares a sentence, inputs the phone number of the opposite party, and activates the send key, then the prepared sentence is constructed as blocks and transmitted to a base station (BS) 12 and a mobile switching center (MSC) connected to the base station 12 through an extra pilot channel as a radio signal. The transmitted SMS blocks are then transferred to a mobile terminal or a terminal equipment (TE) 16 that corresponds to the inputted phone number through a radio network or a public switched telephone network (PSTN) 14. Thereafter, the opposite party ascertains the transmitted character message by decoding the user data included in the transmitted SMS blocks.

In addition to the normal function of executing communication, the implementation of the SMS in the digital mobile station enables the mutual transmission or reception of a predetermined size characters, thus making it more convenient to the user. In other words, a user can separately prepare a sentence and transmit the sentence to the desired opposite party as a radio signal.

However, the conventional SMS has drawbacks in that the length of mutual data

transmission or reception characters is limited. That is, only a specified amount of data determined by the system can be transferred between parties. Accordingly, the radio data transmission can be realized only for text characters with a relatively small amount of data. In other words, graphic data or audio data having a large amount of data relative to the sentence composed of the short characters cannot be transmitted through the SMS.

As a result, the conventional digital mobile station can transmit and receive only a relatively small amount of data through the SMS. Thus, the conventional digital mobile station can not transmit and receive a relatively large amount of data, such as graphic information. Accordingly, in order to transmit a large amount of data, a new system must be provided. Further, the use of another function is limited during the performance of the data service in the conventional digital mobile station.

According to the SMS of the conventional digital mobile station, as described above, the user can only prepare and transmit a short sentence due to the limited size of the data that can be included in the SMS block. Thus, it forces the user to prepare only limited data in transmitting the characters through the SMS. If the user intends to prepare and transmit the sentence with an amount of data larger than which could be included in the SMS block, the sentence must be divided into several sub-sentences prior to transmission. Each of the respective sub-sentences must then be separately prepared and transmitted, causing a great deal of inconvenience to the user. In other words, the transmission of the data with a large amount of data is practically impossible.

Consequently, the conventional digital mobile station has the problem since the user cannot widely use the SMS due to the limited capacity of the SMS in transmitting data, thus it can only transmit and receive a short message.

SUMMARY OF THE INVENTION

The present invention has been made in an effort to solve the problems occurring in the prior art. One object of the present invention is to provide a data transmitting and receiving apparatus and method for a digital mobile terminal that can transmit and receive a relatively large amount of data using a short message service. That is, the present invention provides an apparatus and method which can perform the mutual transmission and reception of a large amount of data between the originating and terminating parties using the typical SMS without constructing a separate device or system.

Another object of the present invention to provide a data transmitting and receiving apparatus and method which can transmit and receive graphic data and audio data having a relatively large amount of data by overcoming the limited capacity of the amount of data that can be transmitted by the SMS of a mobile station in the prior art.

It is still another object of the present invention to provide an SMS block having a new construction so that the transmission and the reception of a large amount of data can be achieved between digital mobile stations. The SMS block proposed by the present

invention can be processed by a standard SMS processing method.

It is yet another object of the present invention to provide a data compression method for a digital mobile station which enables a large amount of data to be transmitted
5 and received using the SMS block.

In order to achieve the above object, there is provided a data transmitting method for a digital mobile station comprising the steps of: (1) reading and encoding stored data in a data transmission mode; (2) generating inherent distinction data transmission headers
10 according to the completion of the data encoding; (3) forming the encoded data and the generated data transmission headers into the user data of a short message service; and, (4) transmitting short message service blocks including the user data of the short message service.

15 According to another aspect of the present invention, there is provided a data receiving method for a digital mobile station comprising the steps of: (1) detecting whether short message service blocks are received; (2) if the short message service blocks are received, detecting whether the detected blocks include predetermined, inherent distinction data transmission headers; (3) detecting whether the data transmission headers are included;
20 (4) analyzing the headers and decoding the received short message service blocks according to the analysis result; and, (5) storing the decoded short message service blocks in succession to the previously processed short message service blocks.

According to still another aspect of the present invention, there is provided a method of constructing short message service blocks for a digital mobile station, comprising the steps of: (1) dividing encoded data into blocks of a predetermined unit; (2) generating inherent data transmission headers corresponding to the respective divided blocks and adding the generated headers to the divided blocks; and, (3) adding short message service headers to the blocks to which the transmission headers are added, respectively.

According to yet another aspect of the present invention, there is provided a short message service data block structure comprising a short message service header region, a transmitted data distinction region, a region for a whole number of blocks of encoded data, a region for a transmission order of the encoded data, a transmitting part distinction region, a region for distinction of a kind of the transmitted data, and a transmitted data region.

BRIEF DESCRIPTION OF THE DRAWINGS

The above objects and advantages of the present invention will become more apparent by describing in detail the preferred embodiments thereof with reference to the attached drawings in which:

FIG. 1 is a block diagram illustrating the construction of a conventional digital mobile station system for performing a short message service;

FIG. 2 is a block diagram illustrating the construction of a data transmitting apparatus for a digital mobile station according to the preferred embodiment of the present invention;

FIG. 3 is a block diagram illustrating the construction of a data receiving apparatus for a digital mobile station according to the preferred embodiment of the present invention;

FIG. 4 is a view illustrating the data structure of a short message service block transmitted and processed according to the preferred embodiment of the present invention;

FIG. 5 is a flowchart illustrating a data transmitting method for a digital mobile station using a short message service according to the preferred embodiment of the present invention;

FIGS. 6A and 6B are flowcharts illustrating an encoding method of the data to be transmitted by the method shown in FIG. 5;

FIG. 7 is a view illustrating a data receiving method for a digital mobile station using a short message service according to the preferred embodiment of the present invention;

FIGS. 8A and 8B are flowcharts illustrating a transmitted data decoding method shown in FIG. 7; and,

FIGS. 9A and 9B are views illustrating the display state of a digital mobile terminal according to the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A reference will now be made in greater detail to the preferred embodiments of the present invention. In the drawings, the same or similar elements are denoted by the same reference numerals even though they are depicted in different drawings. In the following description of the present invention, many specified items such as detailed circuit elements are indicated, but they are provided only for the whole understanding of the present invention, and thus it will be understood by those skilled in the art that the present invention can be performed without such specified items. For the purpose of clarity, a detailed description of known functions and configurations incorporated herein will be omitted as they may make the subject matter of the present invention unclear. Especially, the essential elements of the typical mobile station such as a dual tone multi-frequency (DTMF) section, a vocoder, etc., are not directly related to the subject matter of the present invention, hence a detailed explanation thereof will be omitted. However, such construction should be essentially provided in performing the present invention.

In explaining the preferred embodiment of the present invention with reference to the accompanying drawings, graphic data will be taken as an example of the data transmitted and received through the SMS. This is because the graphic data has a relatively a large amount of data in comparison to the character data, and thus it is judged that taking the graphic data as an example is preferable in explaining the preferred embodiment of the present invention. However, it should be noted that the performance of

the present invention would be normally affected even though the graphic data is replaced by any other type of data.

FIG. 2 is a block diagram illustrating the construction of a data transmitting apparatus for a digital mobile station using the SMS according to a preferred embodiment of the present invention.

Referring to FIG. 2, a control section 20 controls the whole operation of the digital mobile station, and the whole performance of a short message service according to the present invention. The control section 20 is typically implemented by a one-chip microprocessor. In the embodiment of the present invention, the control section 20 controls the compression of the graphic data, the production of the SMS block, the generation of a graphic transmission data header, the readout of the stored graphic data, and the operation of a bit counter.

A memory 23 includes a volatile memory (for example, RAM) and a non-volatile memory (for example, flash memory or EEPROM), and performs the storage of a program for controlling the whole operation of the digital mobile station, the storage of initial service data, and the storage of an operation program for the performance of the short message service, and the data produced according to the performance of the operation program. The memory also performs a buffer function for storing input and output data.

A display section 21 is a user interface device for displaying the whole state of the digital mobile station and input numerals and characters, and is typically implemented by a liquid crystal display (LCD) driven under the control of the control section 20. In the embodiment of the present invention, the display section 21 displays the transmission state
5 of data transmitted under the control of the control section 20 in a specified form, so that the user can visually identify the state of the data transmitted.

A radio signal processing section 22 performs the whole processing of the radio signal transmission and reception between the digital mobile station and the base station to
10 which the digital mobile station belongs. Specifically, the radio signal processing section 22 converts the input audio signal of a radio frequency band to an intermediate frequency (IF) signal, converts the IF signal to a baseband signal, and then converts the baseband signal to a digital signal. Also, in sending the audio signal, the radio signal processing section 22 performs an operation opposite to that described above. Meanwhile, a radio
15 data transmission is performed by the radio signal processing section 22. That is, in the embodiment of the present invention, the produced SMS blocks are radio-transmitted under the operation of the radio signal processing section 22.

An SMS transmitting section 24 makes the prepared sentence and data into the
20 SMS blocks. In making the data into the SMS blocks by the SMS transmitting section 24, the contents of the block are conformable to a standardized format. A typical format includes an SMS header field and an SMS user data field in constructing the SMS block.

The SMS header field follows a determined rule, and the system provider properly determines the size of the SMS user data field. For instance, the Korean digital mobile station system providers determine the size of the SMS user data field to be 100 bytes or so, and this means that the sentence to be transmitted should be prepared as data of 100 bytes or so. Adding the SMS header to the prepared SMS user data field produces the SMS block by the SMS transmitting section 24. The produced SMS block is then transferred to the radio signal processing section 22 to affect the radio data transmission.

A graphic data storage section 28 stores the produced graphic data in a specified form. Specifically, the graphic data is stored in the form of bit streams having respective addresses, and thus the storage regions thereof are different according to the kinds of the graphic data. The data storage capacity is variably determined according to the storage capacity of the memory.

A data compression section 27 is additionally provided according to the embodiment of the present invention, and compresses the data prepared or read out to be transmitted. The data compression section 27 is typically called an encoder which compresses the data to be transmitted by a predetermined compression method. In transmitting the graphic data through the SMS, the data compression section 27 compresses the graphic data having a relatively large amount of data into data having a small amount of data without loss. According to the present invention, a data compression method based on a run length coding (RLC) method is implemented so that the compressed data is

included in the SMS block. This is to be conformable to the fact that the graphic data expressed in the typical mobile station has two components of black and white. As a result, the data compression section 27 is implemented to compress the transmitted data according to the RLC method.

5

A graphic transmission data header generating section 26 generates an inherent distinction header for recognizing that the data compressed, and is transmitted as graphic data. In the present invention, the generated distinction header is called data transmission header and included in the SMS user data field of the SMS block. The format of the data transmission header generated according to the embodiment of the present invention will be explained hereinafter with reference to FIG. 4.

10

A counter 25 increases a specified variable according to the readout of the bits of the graphic data that is read out in the form of bit streams. This variable is defined as a counted value of bits and increases for the readout of one bit. Accordingly, the graphic data having a relatively large amount of data can be transmitted after being compressed and made into the SMS blocks by the data transmitting apparatus of FIG. 2. In the event that the amount of the compressed graphic data exceeds the data size which cannot be included in one SMS block, the data compression section 27 and the control section 20 process to produce another SMS block so as to transmit the large amount of data. That is, in the embodiment of the present invention, a plurality of SMS blocks are produced and transmitted if needed during the SMS transmission of the graphic data.

15

20

FIG. 3 is a block diagram illustrating the construction of a data receiving apparatus for a digital mobile station using the SMS according to a preferred embodiment of the present invention.

Referring to FIG. 3, a control section 30 controls the whole operation of the digital mobile station, and the whole performance of a short message service according to the present invention in a manner similar to the control section of the data transmitting apparatus of FIG. 2. The control section 30 is typically implemented by a one-chip microprocessor. In the embodiment of the present invention, the control section 30 controls the decompression of the compressed graphic data included in the received SMS block, the analysis and process of the graphic transmission data header, and the storage of the decompressed graphic data.

A memory 33 includes a volatile memory and a non-volatile memory, and performs the storage of a program for controlling the whole operation of the data receiving apparatus of the digital mobile station, the storage of initial service data, and the storage of an operation program for the performance of the short message service, and the data produced according to the performance of the operation program according to the embodiment of the present invention. The memory also performs a buffer function for storing input and output data.

A display section 31 serves as a user interface device for displaying the whole

state of the digital mobile station and input numerals and characters. In the embodiment of the present invention, the display section 31 displays the reception state of the data received under the control of the control section 30 in a specified form, so that the user can visually identify the data reception state.

5

A radio signal processing section 32 performs the same operation as the radio signal processing section 22 of the data transmitting apparatus shown in Fig. 2. The radio processing section 32 processes the additionally received SMS block and transfers the processed SMS block to the control section 30.

10

A graphic data storage section 38 stores the graphic data, which has been received and decompressed in a specified form. Specifically, the graphic data is stored in the form of bit streams having respective addresses. The storage regions of the graphic data are different according to the type of the graphic data, and the storage of the graphic data in the respective storage regions is performed in the order of the received SMS blocks. Thus, the respective SMS blocks are stored in their proper storage regions even if the received SMS blocks are in the wrong order. Specifically, if a plurality of SMS blocks that correspond to the graphic data of the same kind are sequentially received, they are stored in the corresponding storage regions in their receiving order to complete the original graphic data. If the SMS blocks are received in the wrong order, they are rearranged to be stored in their proper storage regions according to the order of information included in the respective SMS blocks to accurately complete the original graphic data. And, even if a plurality of SMS

15

20

blocks that correspond to different kinds of the graphic data are received, they are rearranged as the blocks of the same kind and stored in their corresponding storage regions.

A graphic data storage section 38 is implemented by a flash memory typically used
5 in the digital mobile station. A data decompression section 37 is additionally provided according to the embodiment of the present invention, and decompresses the data received and read out. The data decompression section 37 is typically called a decoder that decompresses the received data by a predetermined decompression method for the restoration of the original data. For instance, if the SMS blocks, which have been
10 compressed by and transmitted from the data transmitting apparatus as shown in FIG. 2, are received, the original data of the received SMS blocks is restored by decoding the SMS blocks according to the run length coding (RLC) method. As described above, the decoded data is stored in the specified storage regions of the graphic data storage section 38. A graphic transmission data header analyzing and processing section 36 detects and
15 analyzes distinction headers if the distinction headers are included in the receive SMS blocks. Specifically, if the distinction header is the data transmission header having the format as shown in FIG. 4, the graphic transmission data header analyzing and processing section 36 analyzes the contents of the data transmission header, so that the control operation of the control section 30 is performed accordingly.

FIG. 4 is a view illustrating the data structure of a short message service block which is produced, transmitted, received, and analyzed by the data transmitting and

receiving apparatuses as shown in FIGs. 2 and 3. According to the preferred embodiment of the present invention, the structure of the SMS block will be explained with the data transmission operation in reference to FIG. 4.

Initially, if the capacity of the graphic data exceeds a predetermined extent, the corresponding graphic data is reconstructed and transmitted as a plurality of SMS blocks by the data transmitting apparatus of FIG. 2. The respective SMS block is divided into an SMS header and an SMS user data field in the same manner as the typical SMS block. The SMS header is constructed in the form determined by the digital mobile terminal system. The SMS user data is divided into a graphic data transmission header field and a compressed graphic data field according to the embodiment of the present invention, where it includes the sentence as a coded state according to the conventional SMS.

Specifically, the graphic data transmission header is divided into fields of A, B, C, D, E, F, G, and H, and the graphic data field is divided into fields of I and J, as shown in FIG. 4. The A field includes a code for discriminating that the transmitted SMS block is the SMS block according to the graphic data transmission, and is allocated with 2 bytes. The B field represents the whole number of SMS blocks that constitute one graphic data to be transmitted. The C field represents the order of the SMS blocks to be transmitted. Even though the SMS blocks may be received in the wrong order, the B field identifies the order of the respective SMS block. In the embodiment of the present invention, the B and C fields are allocated with 4 bits, respectively. The D field represents a code for the

distinction of the transmitting part, and the receiving part can recognize which transmitting part the graphic data is transmitted from by detecting the D field. The D field is allocated with 4 bytes. The E field represents a code for the distinction of the kinds of the graphic data, and the receiving part can recognize the kind of the received graphic data by detecting this code even if the SMS blocks according to the various kinds of graphic data are received from the same transmitting part. The F field is a field that is allocated for the extension in use, and the G code is a field representing the coding type, i.e., the type of compression. The receiving part can recognize the compression type of the transmitted data by detecting the G field. The H field is used also for extension, and the I field is a field containing actually compressed graphic data. Thus, the graphic data compressed and transmitted by the transmitting part is positioned in the I field, and this graphic data of the I field is restored to the original data by the receiving part. The graphic data subject to transmission may be composed of a plurality of blocks each of which corresponds to the size of the I field. The J field represents a block terminating code for indicating the termination of one block, and the receiving part recognizes the termination position of the corresponding SMS block by detecting the J code. In the embodiment of the present invention, the E, F, G, H, I, and J fields are allocated with 2 bytes, 3bytes, 1 byte, 1 byte, n bytes, and 6bits, respectively. The size of the I field is determined as the difference value between the size of the graphic data transmission header field and the size of the J field. Producing, transmitting, and receiving the SMS blocks as constructed above represent the process of the present invention.

FIG. 5 is a flowchart illustrating a data transmitting method for a digital mobile station using a short message service according to a preferred embodiment of the present invention, and shows the operation of the data transmitting apparatus of FIG. 2. FIGs. 6A and 6B are a flowchart illustrating a transmitted data encoding method in FIG. 5, and shows the production of the SMS block structured as shown in FIG. 4.

Referring to FIGs. 5, 6A and 6B, the data transmitting method according to the present invention will be explained in detail.

First, if a graphic transmission mode is set by the user in step 510, the input of graphic data is performed. Specifically, the originating and terminating phone numbers are inputted in step 520, and the transmission graphic data to be transmitted is selected and read out in step 530. Then, the size of the SMS user data field is determined by the digital mobile station system in step 540. This value may be fixedly set by the SMS provider, or by the control signal exchange with the user or the base station. The operation in step 540 will be the basis of judging how many blocks constitute the graphic data in making the graphic data into the SMS blocks. For instance, if it is determined that the graphic data is of one Kbytes and the SMS user field is of 100 bytes, the graphic data should be made into at least 10 blocks, and such judgment is affected based on the operation result of step 540.

In step 550, the variable T, which represents the whole number of blocks to be transmitted, is initialized (T=0). In step 560, the graphic data selected and read out in step

530 is encoded according to the determined compression method and to meet the graphic data field, i.e., the I field of the SMS user data. The graphic data is converted into proper blocks by the encoding operation, and the number of the converted blocks is variably determined according to the data amount of the graphic data. In step 570, the graphic data transmission headers are generated and added to the respective produced blocks. The added graphic data transmission headers have the same structure as shown in FIG. 4, but have different contents of the transmission block order field C. The order of the respective transmitted SMS block is determined by the C field. As described above, since the graphic data is transmitted, being divided into blocks, it is required that the original graphic data should be correctly restored according to the order of the blocks. In other words, the plurality of SMS blocks are assembled to one graphic data according to the order of the C field.

In step 580, the data transmission state is displayed on a display screen, so that the user can visually recognize the data transmission state. For instance, the display of the data transmission state is performed with reference to the contents of the B field and the C field, that is, in the form of "C/B". In transmitting a plurality of SMS blocks corresponding to one kind of graphic data, the transmission of the first block is displayed as a "1/T" state, and the transmission of the second block is displayed as a "2/T" state. In step 590, an SMS transmitting operation is performed. Since such SMS transmitting operation is well known in the art a detailed explanation thereof will be omitted. The order (I) of the SMS transmission block is increased by 1 in step 600, and it is judged whether the

order (I) is equal to the total number of blocks (T) in step 610. That is, it is judged whether the SMS block of the final order among the whole SMS blocks is transmitted. If I is not equal to T, this means that the transmission of the graphic data is not completed, and the operation of step 570 is repeatedly performed. If it is judged that I is equal to T in step 610, this means that the final SMS block is transmitted or the transmission of the graphic data is completed, and thus the state of completion of the graphic data transmission is displayed in step 620 to complete the graphic data transmission through the SMS. Consequently, according to the embodiment of the present invention, the data to be transmitted is read out and encoded, and the encoded data is made into SMS blocks, and then the SMS blocks are sequentially transmitted.

Meanwhile, the encoding process of the graphic data to be transmitted in step 560 will now be explained in detail with reference to FIG. 6A which shows the encoding method based on the run length coding.

Initially, the bit-count value is set as "0" in step 561. The graphic data is read bit by bit, and the bit-count value is increased according to the number of readout bits. In step 562, the graphic data is read out bit by bit, and it is judged whether the readout bit is the final bit of the graphic data, i.e., it is judged whether the bit that corresponds to the coordinate value of the final pixel of a picture in step 563. If the final bit is not detected in step 563, the bit-count value is increased by 1 in step 564. Then, it is judged whether the detected bit is "0" or "1". In the embodiment of the present invention, the bit "0" is

designated as a white color of the graphic data, and the bit “1” as a black color of the graphic data. This follows the fact that the LCD of the typical mobile station can display only two colors of white and black. The reason why the bit “0” is designated as white is that the white components exist more than the black components do in the graphic data in probability. If the readout bit is “0” as a result of detection in step 564, the value of the count (C) according to the detection of “0” is increased by 1 in step 566. This operation is for generating a run length code as a part of the compression operation according to the run length coding. If the readout bit is “1” as a result of detection in step 565, the run length coding of the counted value according to the detection of the previous bit “0” is affected in step 567, the counted value is initialized again in step 568, and then the coding of the graphic data to be transmitted is performed by adding the bit “1” detected in step 569 to a result of the run length coding. In other words, if the bit “0” is detected according to the run length coding, its detection number is counted, while if the bit “1” is detected, the bit “1” is added to the coding result of the number of “0” detection, and this result of addition is stored as the graphic data to be transmitted. The SMS provider may properly prepare a table for the coding of the detection number.

In step 571, it is judged whether the bit read out in step 565 is the final bit of the SMS block with reference to the result according to the determination of the SMS user data field. If it is judged that the bit is not the final bit of the SMS block in step 571, it means that the data coding is not completed with respect to the SMS block, and the operation of step 562 is repeated. However, if it is judged that the bit is the final bit of the SMS block,

it means that the graphic data field is fully filled by the coded data to complete one SMS block, and thus the comparison of the transmitted data is performed in step 572. Specifically, the bit stream length of the coded compressed data is compared with that of the original data. This comparison is for selectively transmitting data with less amount of data since the data compressed according to the run length coding may have a larger amount of data than the original data. If it is judged that the graphic data has less data in step 573, the original data is determined as the data to be included in the graphic data field in step 574, and the total number of blocks is increased in step 581. However, if it is judged that the compressed data has less data than the original data in step 573 (this judgment is performed according to the length of the bit stream of the respective data), the compressed data is determined as the data to be included in the graphic data field in step 575, and then a block termination code of 6 bits is added thereto in step 579. As described above, the block termination code serves to indicate the end of one block. Thereafter, the operation of step 581 is performed in the same manner as described above.

Meanwhile, as shown in Fig. 6B, if the final bit of the transmitted graphic data, i.e., the bit corresponding to the final pixel, is detected in step 563, it is judged whether the “0”-detection count (C) is initialized to “0” in step 576. If so, the value of “0”-detection count is coded according to the run length coding in step 578, and then steps 579 and 581 to 585 are sequentially performed in the same manner as step 572, 573, 574, 575, 579, and 581, respectively. Thereafter, step 585 is performed to complete the graphic data encoding process.

FIG. 7 is a view illustrating a data receiving method for a digital mobile station using a short message service according to a preferred embodiment of the present invention, and FIGs. 8A and 8B are flowcharts illustrating a transmitted data decoding method of FIG 7 in more detail. The method illustrated in FIG. 7 is performed by the data
 5 receiving apparatus of FIG. 3.

Referring to FIGs. 7, 8A and 8B, the data receiving method for a digital mobile station according to the embodiment of the present invention will be explained in detail.

10 Initially, during a standby state of the digital mobile station in step 710, it is judged whether SMS blocks are received in step 720. If so, an SMS receiving mode is set in step 730, and it is detected whether graphic data transmission headers are included in the received SMS blocks in step 740. If it is detected that the graphic data transmission headers are included in the received SMS blocks, this means that the received blocks are
 15 not general SMS blocks, but are the blocks including compressed data. Thus, an analysis of the graphic data transmission headers is performed in step 750. Meanwhile, if the graphic data transmission headers are not detected in step 740, a general SMS block processing operation is performed in step 741. In step 750, the detection of the transmitting part distinction code (D field) (step 751), the code of the kind of the graphic data (E field)(step 752), the coding type distinction code (G field)(step 753), the total number of
 20 transmitted blocks (B field)(step 754), and the order of transmitted blocks (C field)(step 755) are sequentially performed. The kind and components of the transmitted SMS blocks

can be recognized by the receiving part according to the respective detected code values.

In step 760, the receiving state of the SMS blocks is displayed with reference to the B field and the C field of the analyzed graphic data transmission header, so that the user can recognize the order of the SMS block currently received. In step 770, the received graphic data is decoded with reference to the G field. In step 780, it is judged whether the currently received SMS block is the block that follows the previously received SMS block, i.e., whether the code of the kinds of the graphic data of the currently received block is identical to that of the previously received block. If so, the graphic data decoded in step 770 is processed in connection with the graphic data of the SMS block previously processed and stored in step 790. As a result, the original graphic data is constructed by assembling the graphic data of the previous SMS block and the graphic data of the currently received SMS block. However, if it is judged that the currently received block is not the block following the previous block in step 780, this means that the currently received graphic data is the graphic data of a different kind or the graphic data transmitted from another transmitting part, and then it is judged whether any storage region exists in the graphic data storage section in step 800. If it is judged that there exists a storage region, the graphic data of the newly received SMS block is stored in step 810. If not, the receiving operation is terminated without storing the corresponding graphic data.

Meanwhile, the decoding operation of step 770 will be explained in detail with reference to FIGs. 8A and 8B.

During a decoding mode of the received graphic data in step 770, the graphic data is read out bit by bit in step 771. In step 772, it is judged whether the readout bit is "1" or "0". If the bit is "0", the value of the "0" - detection count is increased in step 777. In step 778, it is judged whether the block termination code is detected. If the block termination code is detected, the detection operation is terminated, while if not, the operation of step 777 is repeatedly performed. If the bit is "1" in step 772, it is judged whether the value of the "0" - detection count is "0" in step 773. If so, the bit "1" read out in step 773 is stored, as it is in step 774, and the operation of step 771 is repeatedly performed. If it is judged that the value of the "0" - detection count is not "0", the bit "0" of the original graphic data is produced through the value of the "0" - detection count according to the run length coding in step 775. In step 776, the bit "0" produced in step 775 is stored as it is, and the operation of step 771 is repeatedly performed. As a result, the decoding operation of the data compressed through the run length coding is completed.

As described above, the present invention provides the advantages that it can transmit and receive user information having a relatively large amount of data using a typical short message service between digital mobile stations which belong to a radio network. That is, the present invention can perform the mutual transmission and reception of the user information having a large amount of data between the originating and the terminating mobile stations without constructing a separate device or system for the transmission and reception of the user information.

Also, the present invention provides the advantages that it can transmit and receive information having a relatively large amount of data such as graphic data and audio data by overcoming the limited condition of the amount of transmitted data that the SMS implemented in the typical mobile station has. This can be affected by providing a new SMS block structure which enables the transmission and reception of the user information having a large amount of data between the mobile terminals, and this SMS block can be processed by the typical SMS block processing method.

Also, the present invention can provide a data compression method for a digital mobile station, which enables the user information having a large amount of data to be included in the SMS block in transmitting and receiving the user information using the SMS.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiment; on the contrary, it is intended to cover various modifications within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A data transmitting apparatus for a digital mobile station, said apparatus comprising:

5 a data storage section for storing data to be transmitted;
 an encoding section for reading and encoding the stored data in a predetermined form;
 a data transmission header generating section for generating inherent distinction data transmission headers corresponding to the data encoded by the encoding section;
 10 a control section for forming the encoded data and the generated data transmission headers into user data of a short message service; and,
 a short message transmitting section for transmitting short message service blocks which include the user data of the short message service.

15 2. The data transmitting apparatus as claimed in Claim 1, wherein the encoding section includes means for encoding the readout data by a run length coding.

3. The data transmitting apparatus as claimed in Claim 1, wherein the data transmission header generating section comprises:

20 a data header field for distinctively identifying the transmitted data; and,
 a transmitted data field allocated with the encoded transmitted data.

4. The data transmitting apparatus as claimed in Claim 3, wherein the data header field includes a transmitted data distinction field, a transmitting part distinction field, and a field for distinction of a kind of the transmitted data.

5. The data transmitting apparatus as claimed in Claim 3, wherein the transmitted data field further comprises a field which has a field length predetermined by a system, which is properly allocated with the encoded data corresponding to the field length, and which is allocated with a block termination code for indicating the termination of the allocated encoded data.

6. The data transmitting apparatus as claimed in Claim 1, wherein the control section includes a means for dividing the encoded data into blocks having a proper amount of data, adding the data transmission headers having different transmission orders to the respective divided blocks, and forming the respective blocks added with the data transmission headers into the user data of the short message service.

7. The data transmitting apparatus as claimed in Claim 6, wherein the control section forms the short message blocks by adding the short message service headers to the user data of the short message service.

8. The data transmitting apparatus as claimed in Claim 7, wherein the short message service transmitting section sequentially transmits the short message service

blocks with reference to transmission orders added to the data transmission headers.

9. A data receiving apparatus for a digital mobile terminal, said apparatus comprising:

5 a data transmission header detecting and analyzing section for detecting predetermined inherent data transmission headers from received short message service blocks, and analyzing the detected data transmission headers;

a decoding section for decoding the received short message service blocks in a predetermined form according to the data transmission headers detected by the data transmission header detecting and analyzing section;

10

a control section for distinctively determining storage regions of the decoded short message service blocks according to a result of analyzing the data transmission headers; and,

a data storage section for storing the decoded short message service blocks according to the determined storage regions.

15

10. The data receiving apparatus as claimed in Claim 9, wherein the decoding section includes a means for decoding the received short message service blocks by a run length decoding.

20

11. The data receiving apparatus as claimed in Claim 9, wherein the data transmission header detecting section includes a means for detecting from the received

short message service blocks code data included in a data header field for the distinction of transmitted data and a transmitted data field allocated with encoded transmitted data, and for analyzing the detected code data.

5 12. The data receiving apparatus as claimed in Claim 11, wherein the data transmission header detecting and analyzing section detects and analyzes code data from the data header field including a transmitted data distinction field, a transmitting part distinction field, a transmitted data kind distinction field, and a transmitted block order field.

10 13. The data receiving apparatus as claimed in Claim 11, wherein the data transmission header detecting and analyzing section detects and analyzes a block termination code which is included in the transmitted data field and which indicates a final data of the received short message service block.

15 14. The data receiving apparatus as claimed in Claim 9, wherein the control section includes a means for designating storage orders of the decoded short message service blocks according to an analysis result of the respective data transmission headers included in the respective received short message service blocks, and for then determining
20 storage positions of the short message service blocks.

15. A data transmitting method for a digital mobile station using a short message service, said method comprises the steps of:

- (1) reading and encoding stored data in a data transmission mode;
- (2) generating inherent distinction data transmission headers according to completion of data encoding;
- (3) forming the encoded data and the generated data transmission headers into user data of a short message service; and,
- (4) transmitting short message service blocks including the user data of the short message service.

16. The data transmitting method as claimed in Claim 15, further comprising the steps of:

- (5) comparing an amount of the encoded data with that of the readout data; and,
- (6) selecting the data having a lesser amount of data as the result of comparison, and forming the selected data and the generated data transmission header into the user data of the short message service.

17. The data transmitting method as claimed in Claim 15, wherein step (1) includes encoding the readout data by a run length coding.

18. The data transmitting method as claimed in Claim 15, wherein step (2) includes generating the data transmission header, which includes a transmitted data

distinction field for distinction of the transmitted data, a field for a whole number of blocks of the encoded data, a field for a transmission order of the encoded data, a transmitting part distinction field, and a field for the distinction of a kind of the transmitted data.

5 19. The data transmitting method as claimed in Claim 15, further comprising the steps of:

(5) making the encoded data into blocks having a predetermined amount of data if the amount of the encoded data is larger than a predetermined amount of data;

10 (6) adding inherent data transmission headers and short message service headers to the respective data blocks; and,

(7) sequentially transmitting the data blocks in a predetermined order.

20 20. The data transmitting method as claimed in Claim 19, further comprising the step of:

15 (8) adding a block termination code which indicates a final data of the block to the respective data block.

~~21.~~ A data receiving method for a digital mobile station using a short message service, comprising the steps of:

20 (1) detecting whether short message service blocks are received in a standby state;

(2) detecting whether the detected short message service blocks detected in step

(1) include predetermined inherent distinction data transmission headers;

(3) analysing the data transmission headers and then decoding the received short message service blocks according to a result of analysis if the data transmission headers detected in step (2) include predetermined inherent distinction data transmission header; and,

5 (4) storing the decoded short message service blocks in succession to previously processed short message service blocks.

22. The data receiving method as claimed in Claim 21, wherein the step (2) includes detecting whether a transmitted data distinction code for distinction of the
10 transmitted data is included in the distinction data transmission header.

23. The data receiving method as claimed in Claim 21, wherein the step (3) includes detecting and analyzing a transmitted data distinction code for distinction of the transmitted data, a code for a whole number of blocks of the encoded data, a code for a
15 transmission order of the encoded data, a transmitting part distinction field, and a field for distinction of a kind of the transmitted data.

24. The data receiving method as claimed in Claim 21, wherein the step (3) includes decoding the received short message service blocks by a run length decoding.

25. The data receiving method as claimed in Claim 21, further comprising the
20 step of:

(5) storing the decoded short message service block in a different storage region from that of the previously processed and stored short message service block.

26. A short message service data transmitting method for a digital mobile station comprising the steps of:

(1) reading and encoding stored data and making the encoded data into blocks of a predetermined unit in a short message service data transmission mode;

(2) generating inherent transmission headers corresponding to the respective data blocks and adding the transmission headers to the data blocks encoded in step (1), respectively;

(3) adding short message headers to the data blocks to which the transmission headers generated in step (2) are added, respectively; and,

(4) sequentially transmitting the data blocks.

27. The short message service data transmitting method as claimed in Claim 26, wherein the inherent transmission headers generated in step (2) includes a transmitted data distinction field, a field for a whole number of blocks of the encoded data, a field for a transmission order of the encoded data, a transmitting part distinction field, and a field for distinction of a kind of the transmitted data.

28. The short message service data transmitting method as claimed in Claim 27, further comprising the step of sequentially transmitting the blocks in step (4) with

reference to the field for the transmission order of the encoded data.

29. The short message service data transmitting method as claimed in Claim 26, further comprising the step of displaying a state of the blocks sequentially transmitted in step (4) with reference to the generated inherent transmission headers.

30. A method of constructing short message service blocks for a digital mobile station, comprising the steps of:

- (1) dividing encoded data into blocks of a predetermined unit;
- (2) generating inherent data transmission headers corresponding to the respective divided blocks and adding the generated data transmission headers to the divided blocks, respectively; and,
- (3) adding short message service headers to the divided blocks to which the data transmission headers are added, respectively.

31. The method as claimed in Claim 30, further comprising the step of:

- (4) generating and adding to the respective divided blocks a block termination code for indicating a final data of the respective block.

32. The method as claimed in Claim 30, wherein the generated inherent data transmission header comprises a transmitted data distinction field including a transmitted data distinction code, a field for a whole number of blocks, a transmission order field, a

transmitting part distinction field, and a field for distinction of a kind of the transmitted data.

33. The method as claimed in Claim 32, wherein the generated inherent data
5 transmission header further comprises a coding type distinction field for indicating an encoding type.

34. The method as claimed in Claim 30, wherein the generated inherent data
10 transmission header further comprises an extension field applied and used according to an intent of a service provider.

35. A short message service data block structure, comprising a user data field
region which includes a short message service header field including a short message
service header, a data header field for distinction of transmitted data, and a transmitted data
15 field including encoded transmitted data.

36. The short message service data block structure as claimed in Claim 35,
wherein the data header field comprises a transmitted data distinction field, a field for a
whole number of blocks of the encoded data, a field for a transmission order of the encoded
20 data, a transmitting part distinction field, a distinction field of a kind of the transmitted data,
and a transmitted data field.

37. The short message service data block structure as claimed in Claim 36 wherein the transmitted data distinction field is composed of 2 bytes, the field for the whole number of blocks of the encoded data is composed of 4 bits, the field for the transmission order of the encoded data is composed of 4 bits, the transmitting part distinction field is composed of 4 bytes, the distinction field of the kind of the transmitted data is composed of 2 bytes, the transmitted data field is composed of predetermined bytes set by a system, the encoding type distinction field is composed of 6 bits, and the block termination distinction field is composed of 6 bits.

38. The short message service data block structure as claimed in Claim 36, wherein the data header field further comprises an encoding type distinction field.

39. The short message service data block structure as claimed in Claim 38, wherein the transmitted data distinction field is composed of 2 bytes, the field for the whole number of blocks of the encoded data is composed of 4 bits, the field for the transmission order of the encoded data is composed of 4 bits, the transmitting part distinction field is composed of 4 bytes, the distinction field of the kind of the transmitted data is composed of 2 bytes, the transmitted data field is composed of predetermined bytes set by a system, the encoding type distinction field is composed of 6 bits, and the block termination distinction field is composed of 6 bits.

40. The short message service data block structure as claimed in Claim 35,

further comprising a block termination distinction field for distinction of a termination of the block.

41. The short message service data block structure as claimed in Claim 40 wherein the transmitted data distinction field is composed of 2 bytes, the field for the whole number of blocks of the encoded data is composed of 4 bits, the field for the transmission order of the encoded data is composed of 4 bits, the transmitting part distinction field is composed of 4 bytes, the distinction field of the kind of the transmitted data is composed of 2 bytes, the transmitted data field is composed of predetermined bytes set by a system, the encoding type distinction field is composed of 6 bits, and the block termination distinction field is composed of 6 bits.

42. A short message service block transmitting and receiving apparatus for a digital mobile station, comprising:

a short message service block transmitting and receiving section for transmitting and receiving short message service blocks;

a transmitted data storage section for storing the transmitted and received short message service blocks;

a data coding section for encoding the transmitted data and dividing the encoded data into blocks of a predetermined unit, the data coding section sequentially decoding the blocks sequentially received in a predetermined order;

a header generating section for generating inherent transmission headers to be

added to the respective blocks;

a transmission header detecting and analyzing section for detecting and analyzing the inherent transmission headers included in the received short message service blocks; and,


5 a control section for designating a storage order of the decoded blocks according to a result of analyzing the detected transmission headers, adding short message service headers to the respective blocks to which the transmission headers are added, and transmitting the blocks including the transmission headers and the short message service headers added thereto.

10 43. The short message service block transmitting and receiving apparatus as claimed in Claim 42, further comprising a display section for displaying a state of the short message service transmitted and received according to the result of analyzing the detected transmission headers.

ABSTRACT OF THE DISCLOSURE

Disclosed is an apparatus and method of transmitting and receiving storage data for a digital mobile station, and more particularly a data transmitting and receiving apparatus and method capable of transmitting and receiving a large capacity of data using a short message service. According to the data transmitting method, stored data is read and encoded in a data transmission mode, and inherent distinction data transmission headers are generated according to the completion of the data encoding. the encoded data and the generated data transmission headers are formed into the user data of a short message service, and short message service blocks including the user data of the short message service are transmitted.

FIG. 1

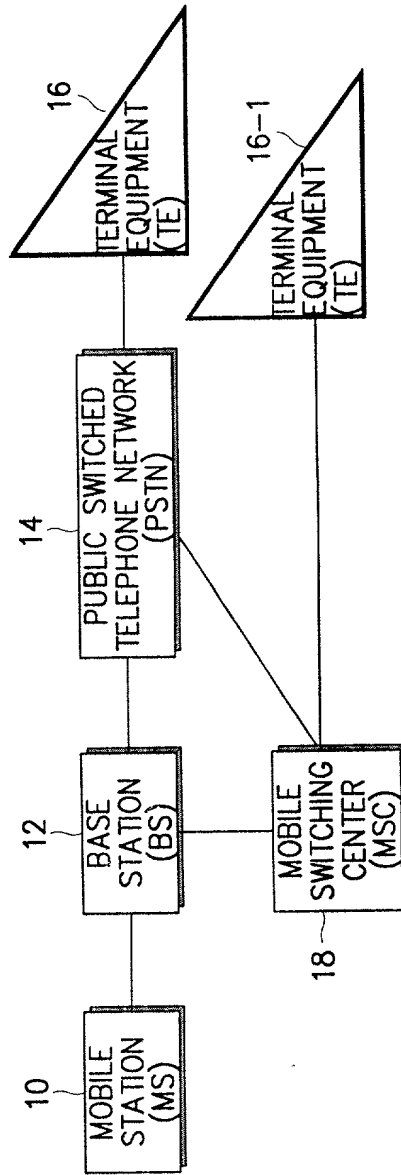

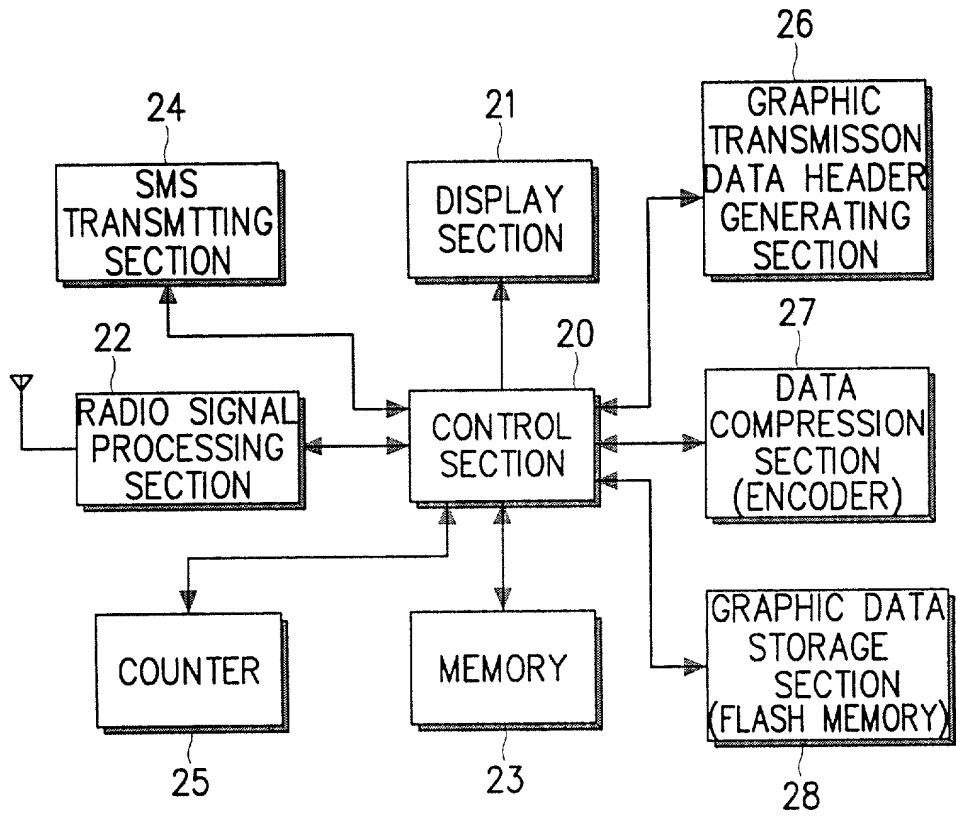


FIG. 2


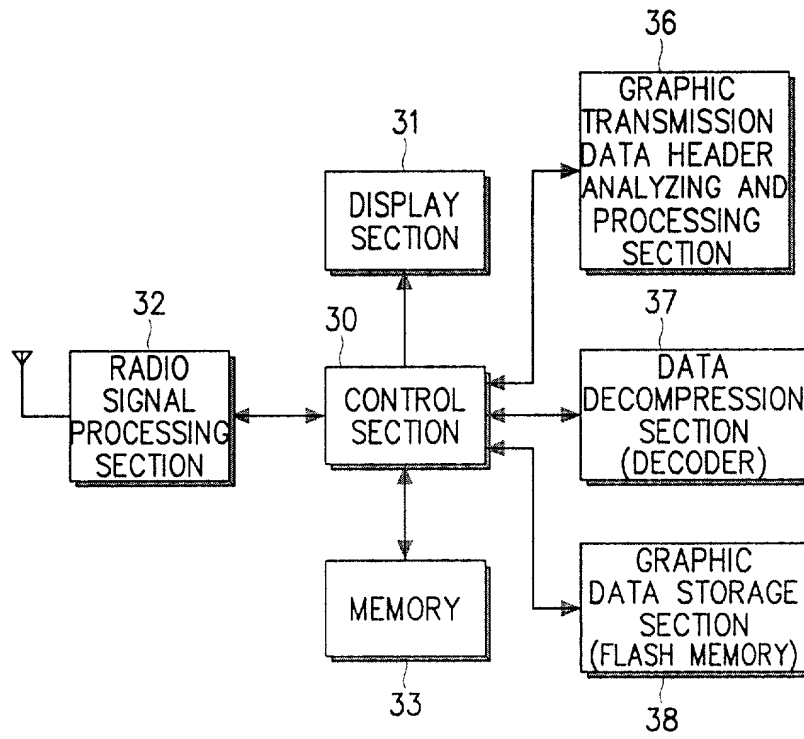


FIG. 3

FIG. 4

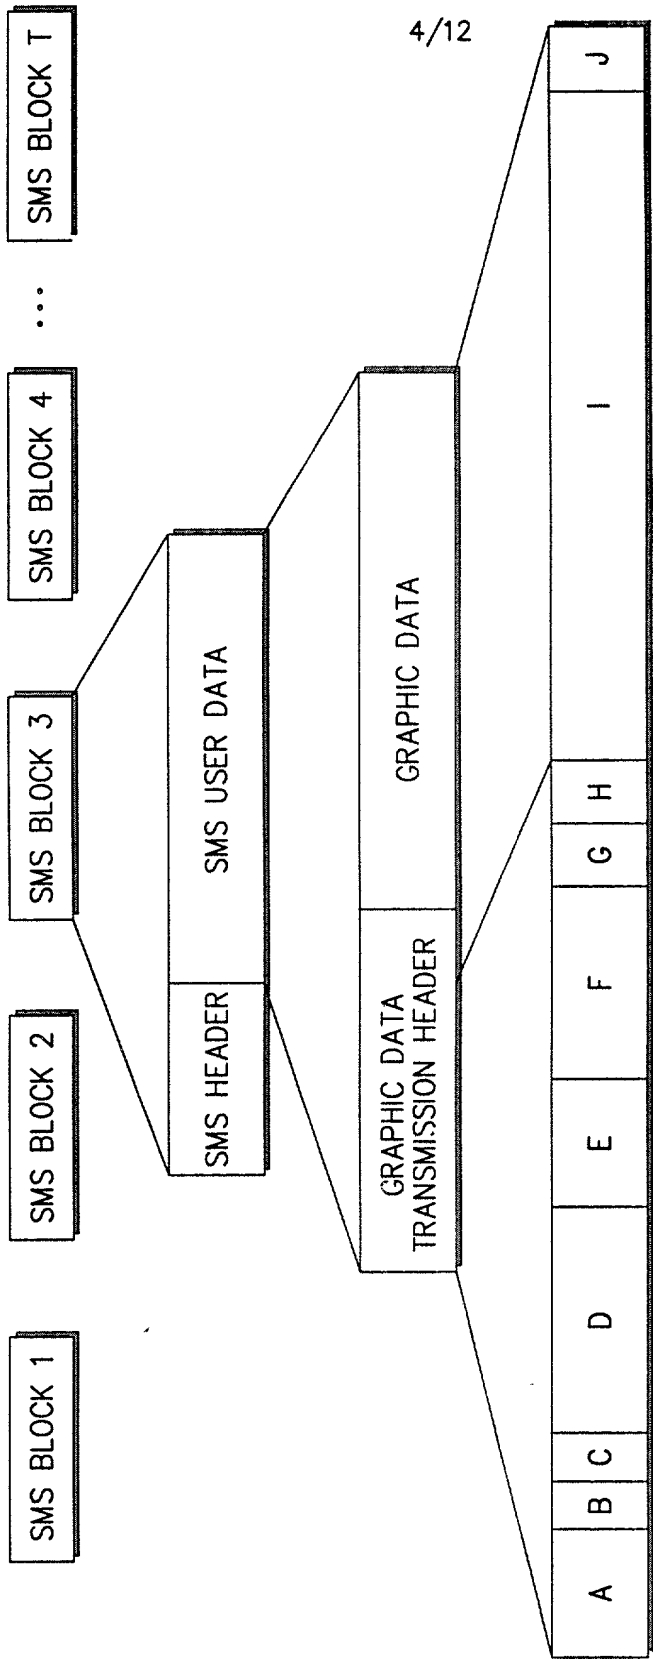

- A(2byte); GRAPHIC DATA DISTINCTION CODE
- B(4bit); THE TOTAL NUMBER (T) OF TRANSMITTED BLOCKS
- C(4bit); THE ORDER (I) OF TRANSMITTED BLOCKS
- D(4byte); TRANSMITTING PART DISTINCTION CODE
- E(2byte); CODE FOR THE KIND OF GRAPHIC DATA
- F(3byte); EXTENSION CODE
- G(1byte); CODING TYPE DISTINCTION CODE
- H(1byte); EXTENSION CODE
- I(nbyte); GRAPHIC DATA
- J(6bit); BLOCK TERMINATION CODE

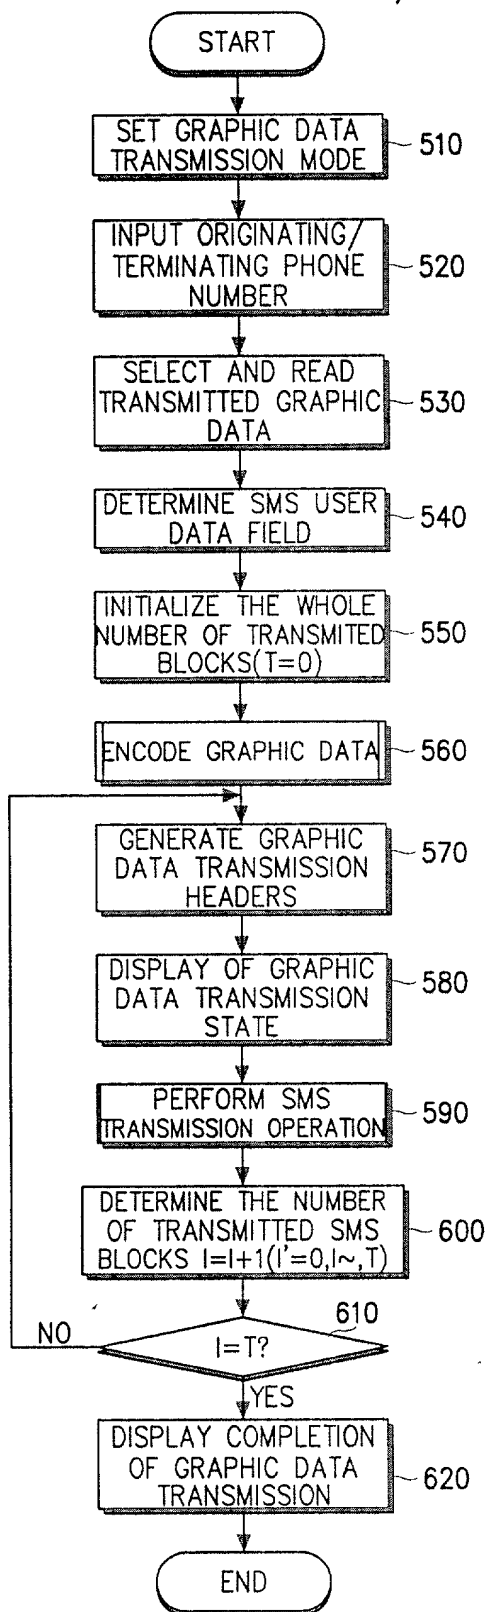


FIG. 5

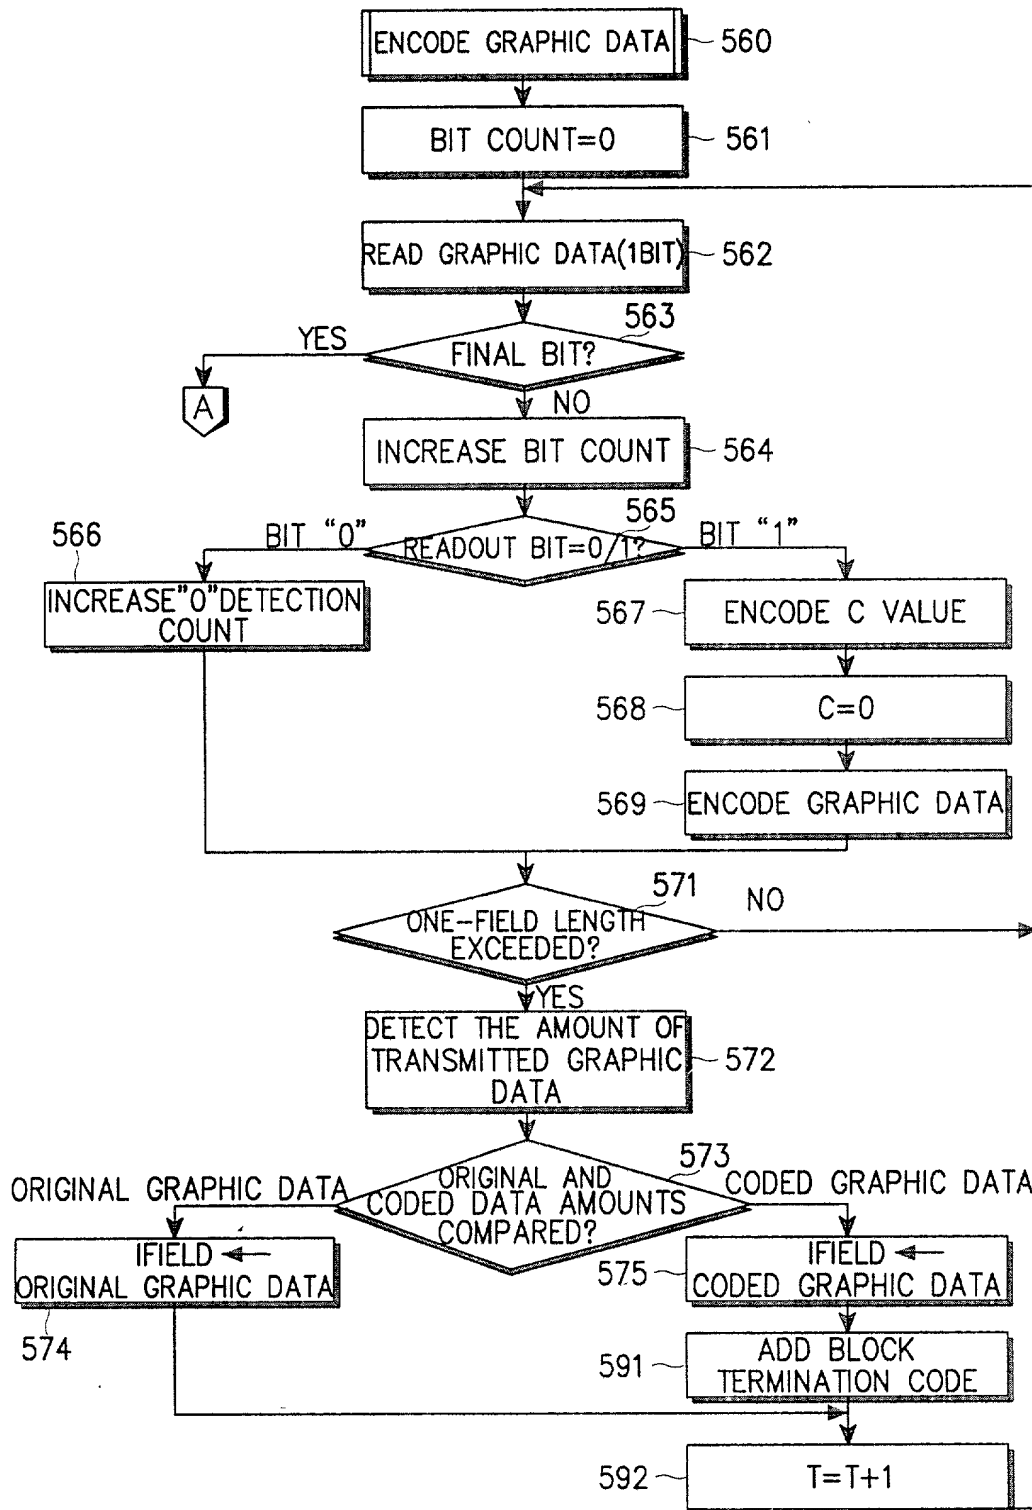


FIG. 6A

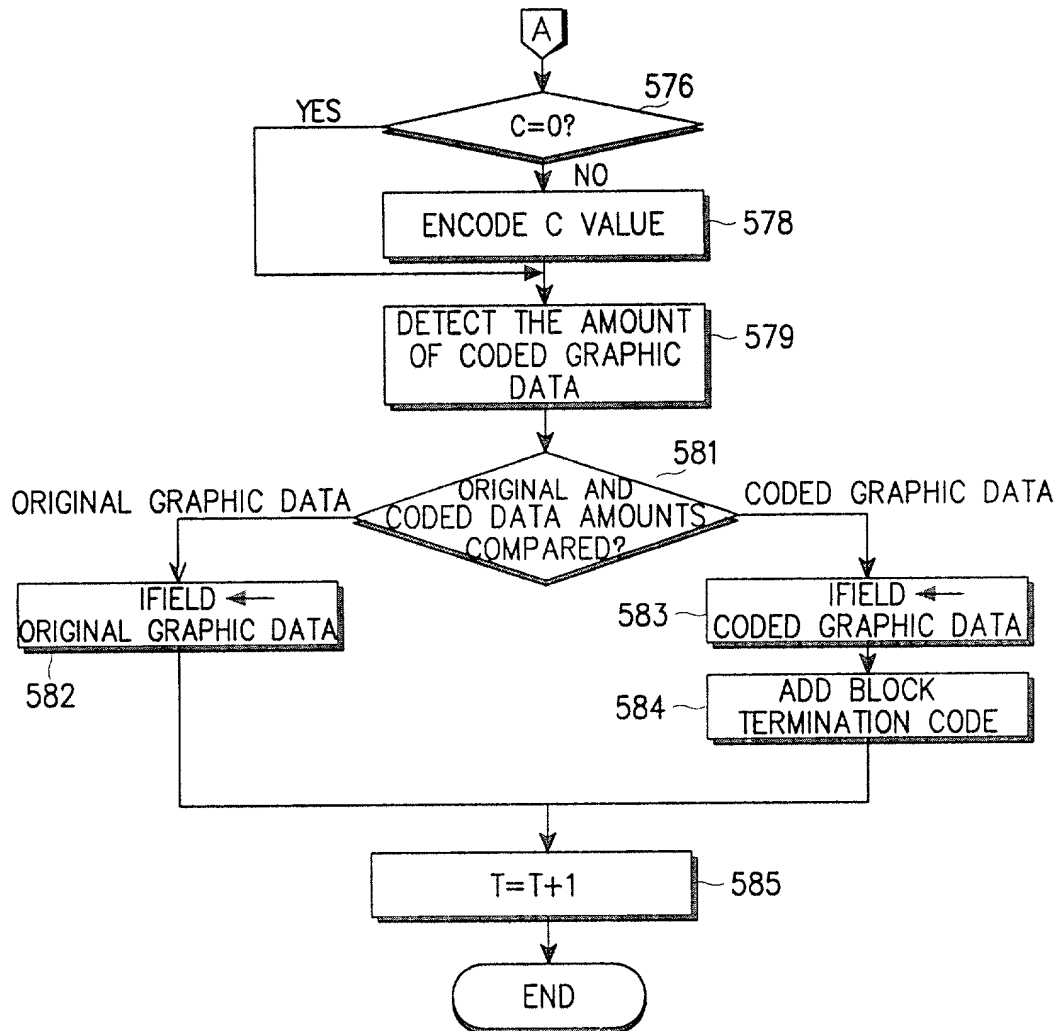


FIG. 6B

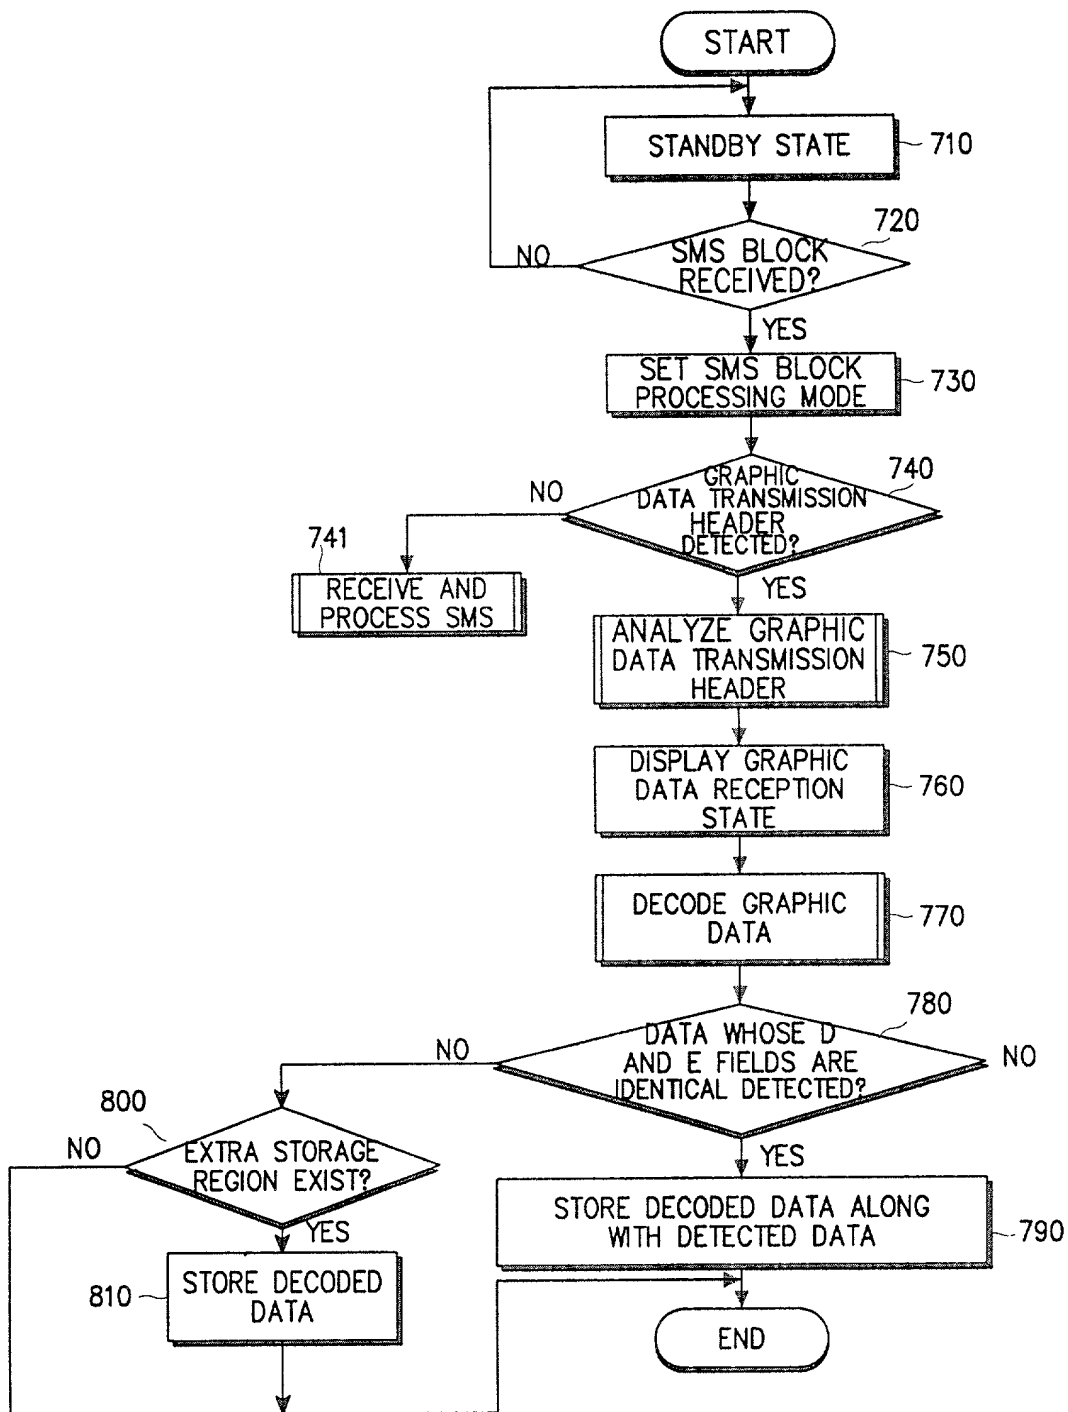


FIG. 7

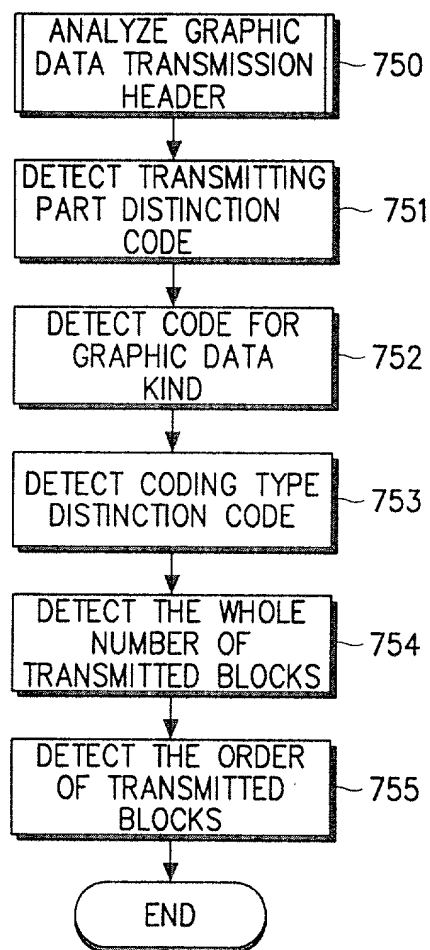


FIG. 8A


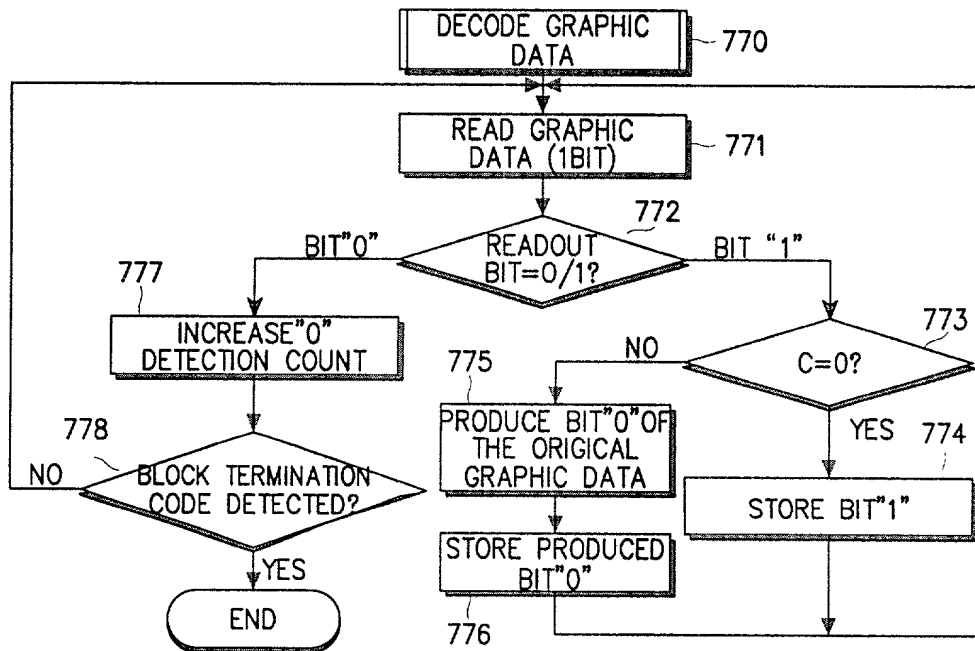


FIG. 8B

FIG. 9A

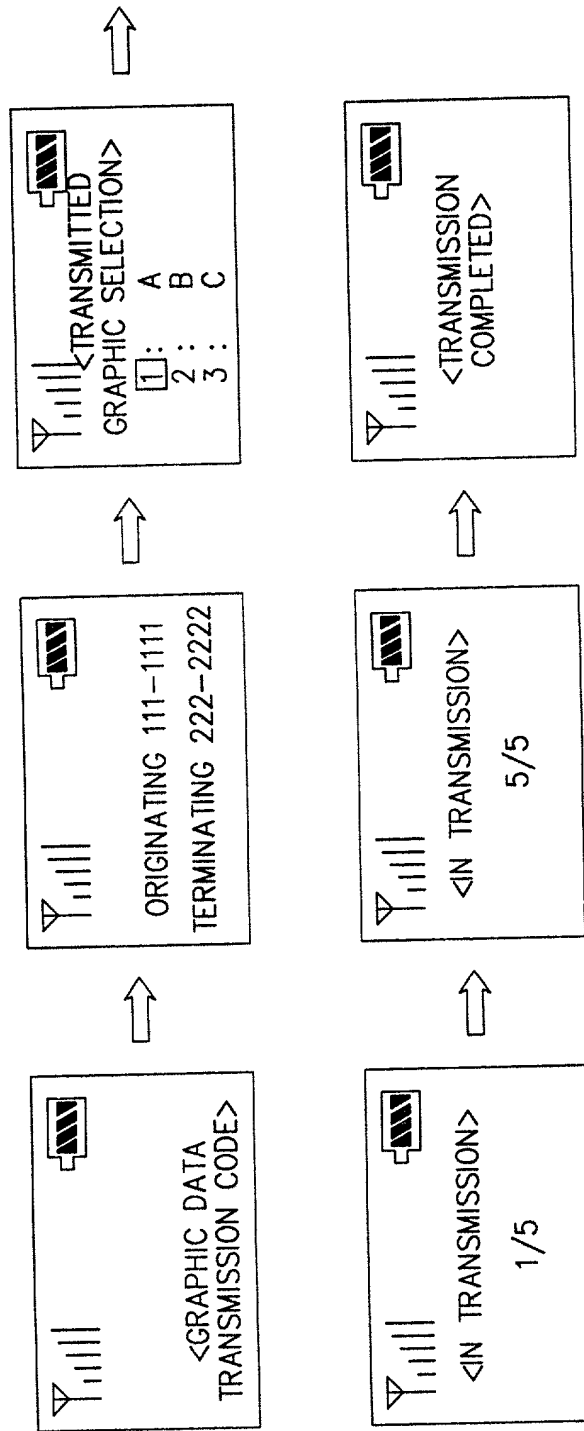

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Seng-Wook Sim; Joung-Kyou Park; Ki-Sang Jeon; Young-Jin Lee

Serial No: *Not yet assigned.* Examiner: *Not yet assigned.*

Filed: March 20, 2000 Group: *Not yet assigned.*

For: DATA TRANSMITTING AND RECEIVING APPARATUS AND METHOD FOR
DIGITAL MOBILE STATION


TRANSMITTAL OF DECLARATION

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

This transmittal accompanies a fax copy of Declaration with the signature by the inventors, for the above-captioned application. A substitute Declaration with the inventors' signature will be filed upon receipt of the Serial No. for the above-captioned application.

Respectfully submitted,



Steve S. Cha
Attorney for the Applicant
Registration No.: 44,069

Customer No.: 022491

67 Wall Street #2411
New York, NY 10005-3198
(212)968-7101

Date: March 20, 2000

PTO/SB/02B

Customer No.:022491

Docket No.: P992084

DECLARATION AND POWER OF ATTORNEY

As a below named inventor (s), I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DATA TRANSMITTING AND RECEIVING APPARATUS AND METHOD FOR A DIGITAL MOBILE STATION

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

f acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulation, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor=s certificate listed below and have also identified below any foreign application for patent or inventor=s certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

1999-9435 _____
(Number)

Republic of Korea . . .
(Country)

03/19/1999
(Day/Month/Year Filed)

Priority Claimed
☒ Yes ☐ No

(Number)

(Country)

(Day/Month/Year Filed)

☐ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of the Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulation, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

Yong-Tin Lee

03/20/00

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---